



Ultimate painting solution for your dream home

BREATHE EASY WALL PUTTY



PRODUCT DESCRIPTION

Breathe Easy Wall Putty is a Volatile Organic Compound (VOC) free product that provides a friendly environment and is odor free. It seals the pores, uneven spots and cracks, and smoothenes the wall. It decreases the amount of paint consumption and gives the walls a rich finish with perfect gloss. Its highly durable pure acrylic emulsion strengthens the binding of the paint with the wall. It conforms requirements of GS - II



BIO FRESH



GREEN LABEL SINGAPORE



ENVIRONMENT FRIENDLY



ULTRA LOW VOC



PRODUCT INFORMATION


PACK SIZES



5 Kg

25 Kg

COVERAGE

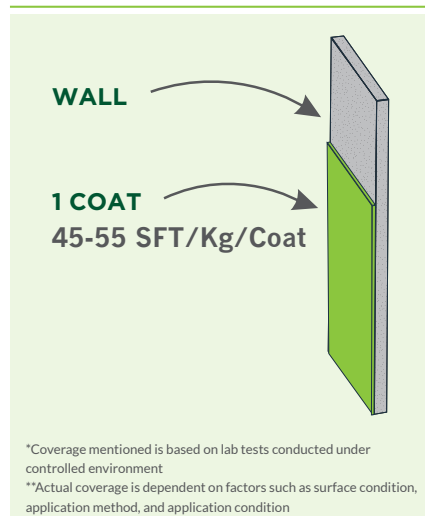

UNIQUE FEATURE



Odor Free

SURFACE PREPARATION



Recommended Surfaces



Concrete Stone



Interior
Cement Plaster



Brick Asbestos



Cement Sheet



Surface Preparation
Method

After plastering, allow the surface to dry for at least 8-12 weeks. Moisture content should be less than 15%. Before application, ensure that the surface is clean, dry, free from loose particles, dust, dirt, grease, wax, mould, fungal growth, etc. The product should not be applied on surfaces with continuous seepage or dampness.

Berger offers a complete range of surface treatment solutions, please call 08000-123456 or visit your nearest Berger Experience Zone for more information.



METHOD OF APPLICATION



Clean surfaces by sanding with emery paper



Apply one coat of 100% thinned Breathe Easy Water Based Sealer and allow to dry for 4-6 hours



Apply two coats of Breathe Easy Wall Putty with a 6-8 hours interval



After overnight drying of Putty, sand smooth with emery paper



MIXING RATIOS

Ready to Use



ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply at temperature below 10°C (50°F)



ACCOMPANYING PRODUCT



Breathe Easy Water Sealer



SHEEN SCALE AND SHADE

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss

***Only available in White**



PRODUCT SPECIFICATION



TYPE OF CURE


Coalescence



SHELF LIFE



VISCOSITY AT (30±1)°C



TOUCH DRY



PIGMENTATION

TITANIUM DIOXIDE

MAGNESIUM

ALUMINUM SILICATE



METHOD OF APPLICATION



PUTTY KNIFE



HARD DRY



(Recoat)



SOLVENT



WATER



PROPYLENE GLYCOL



VOC

<05 gm/Ltr



AROMATIC CONTENT



Below 50 ppm

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface.