



Ultimate painting solution for your dream home

RADIANCE INTERIOR EMULSION



PRODUCT DESCRIPTION

Radiance Interior Emulsion is an Acrylic Plastic emulsion paint that is available in the widest range of mood creating shades. It dries rapidly and its washability gives the walls a bright & smooth look. Its distinctive brightness provides your wall a fresh look reducing dirt picking tendency. Based on highly durable pure acrylic binder, RIN provides a better protection for interior walls! It is characterized by excellent flow and leveling, resulting in a smooth finish.



LONG LASTING



RICH LOOK



SMOOTH SHEEN




EXCELLENT FLOW AND LEVELING




ENVIRONMENT FRIENDLY

PRODUCT INFORMATION

PACK SIZES

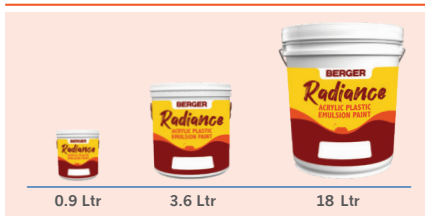

COVERAGE

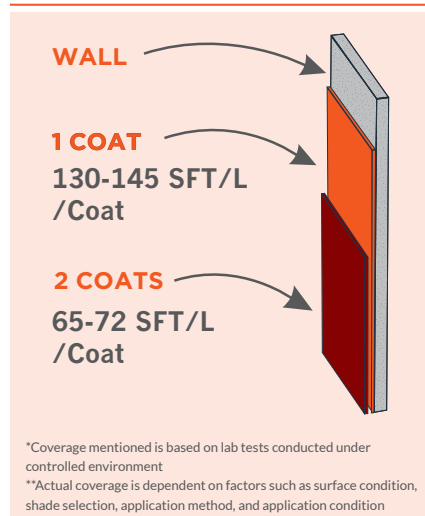


UNIQUE FEATURE





AVAILABLE SHADES



WASHABILITY

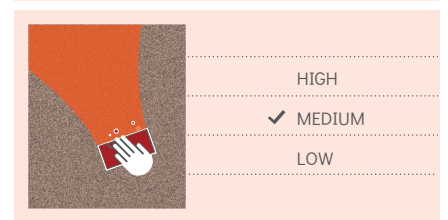

SURFACE PREPARATION

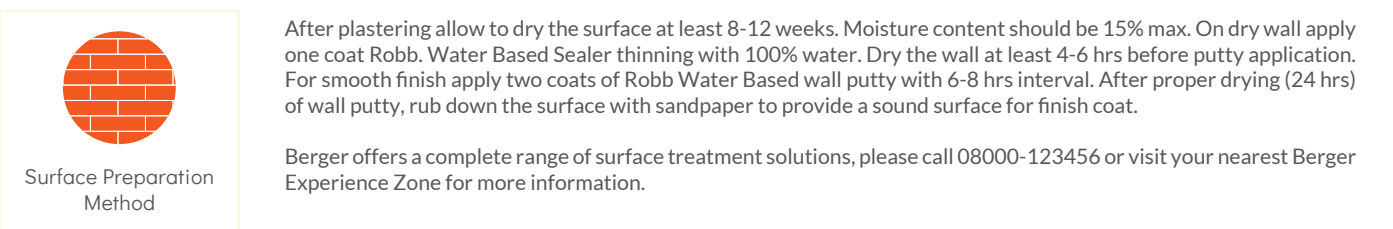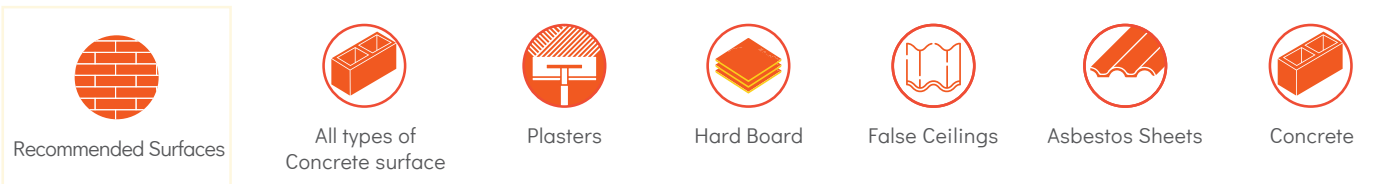



METHOD OF APPLICATION



Clean surfaces by sanding with emery paper



Apply one coat of 100% thinned Robb. Water Based Sealer and allow to dry for 4-6 hours



Apply two coats of Robb. Wall Putty with a 6-8 hours interval



After 24 hrs drying of Putty, sand smooth with emery paper



Apply 2 coats of Radiance Interior Emulsion as finishing coat with 6 hours interval



MIXING RATIOS



For Brush - Paint : Water = 2 : 1
For Roller - Paint : Water = 3 : 1
(By volume)



ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at temperature below 10°C (50°F)



RECOMMENDED UNDERCOATS



Robb. Wall Putty



Robb. Water Sealer



SHEEN SCALE

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss



PRODUCT SPECIFICATION



SHADE/COLOR

2000+*


*Currently available through Berger Color Bank




SHELF LIFE



VISCOSITY AT 30°C



GLOSS/SHEEN LEVEL




PIGMENTATION

TITANIUM DIOXIDE
MAGNESIUM SILICATE
ALUMINIUM SILICATE



METHOD OF APPLICATION



TOUCH DRY



SOLVENT




VOC

≤ 30 g/L



HARD DRY



POT LIFE AFTER THINNING



*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface.