




Ultimate painting solution for your dream home

ROBBIALAC WALL PUTTY



PRODUCT DESCRIPTION

Robb. Water Based Wall Putty is an excellent product for wall which seals the pores & uneven spots and cracks of wall and smoothen the wall. Robb Water Based Wall Putty decreases the amount of paint consumption and gives the walls rich finish with perfect gloss. Its highly durable pure acrylic emulsion strengthens the binding of the paint with the wall.

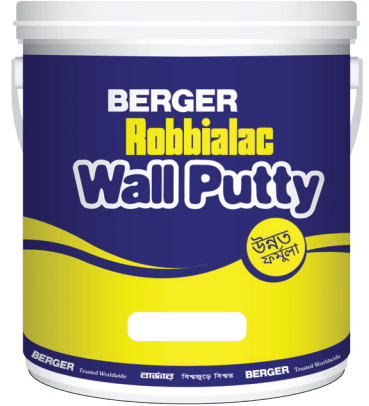

WATER BASED PUTTY BASED ON ACRYLIC POLYMER



ALKALI & EFFLORESCENCE RESISTANCE



PHYSICAL BARRIER TO SALT MIGRATION



LOW VOC AND REDUCES THE GREENHOUSE EMISSIONS



ENSURES STRONG ADHESION TO TOP COAT

PRODUCT INFORMATION

PACK SIZES



5 Kg

25 Kg

COVERAGE

WALL →

1 COAT →

45-55 SFT/Ltr/coat
(Depending upon the surface)

*Coverage mentioned is based on lab tests conducted under controlled environment
**Actual coverage is dependent on factors such as surface condition, application method, and application condition

UNIQUE FEATURE



SMOOTH FINISH



EASY TO USE

SURFACE PREPARATION



Recommended Surfaces



All types of Plasters



Concrete Stone



Surface Preparation Method

After plastering, allow the surface to dry for at least 8-12 weeks. Moisture content should be less than 15%. Before application, ensure that the surface is clean, dry, free from loose particles, dust, dirt, grease, wax, mould, fungal growth, etc. The product should not be applied on surfaces with continuous seepage or dampness.

Berger offers a complete range of surface treatment solutions, please call 08000-123456 or visit your nearest Berger Experience Zone for more information.



METHOD OF APPLICATION



Clean surfaces by sanding with emery paper



Apply one coat of 100% thinned Robb Water Based Sealer and allow to dry for 4-6 hours



Apply two coats of Robb Wall Putty with a 6-8 hours interval



After overnight drying of Putty, sand smooth with emery paper



MIXING RATIOS

Ready to Use




ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at temperature below 10°C (50°F)



ACCOMPANYING PRODUCT



Robbialac Water Based Sealer



SHEEN SCALE | 2 SHADE

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss

***Only available in White**



PRODUCT SPECIFICATION



TYPE OF CURE

Coalescence



PIGMENTATION


TITANIUM DIOXIDE

MAGNESIUM SILICATE


ALUMINUM SILICATE



VISCOSITY AT 30°C



TOUCH DRY



SOLVENT



WATER



ETHYLENE GLYCOL



GLYCOL ETHER




METHOD OF APPLICATION



PUTTY KNIFE



HARD DRY



(Recoat)

*For finish coat application after 24 hrs



VOC

≤ 10 g/L
ISO 11890-2




VEHICLE

Special type acrylic emulsion




PRESERVATIVES (FORMALDEHYDE)



Approximate 100 ppm



AROMATIC CONTENT



Below 100 ppm

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface.