



Ultimate painting solution for your dream home

BERGER ALL PURPOSE PUTTY WHITE



PRODUCT DESCRIPTION

Berger All Purpose Putty White provides a solution for both interior and exterior walls. This product contains a self-curing formula, which allows it to be used on surfaces just after 15 days of applying plaster. It is not necessary to apply water after the application of this putty. In addition, the product is odor-free which makes it easier to use. The walls also need minimal sanding after using this product which makes it user-friendly for painters.



CEMENT BASED COATING



PHYSICAL BARRIER TO SALT MIGRATION



SMOOTHENS THE WALL WITH EXCELLENT FINISH



FREE FROM HEAVY METAL




APPLICABLE FOR BOTH INTERIOR AND EXTERIOR PLASTERED SURFACE

PRODUCT INFORMATION


PACK SIZES



COVERAGE

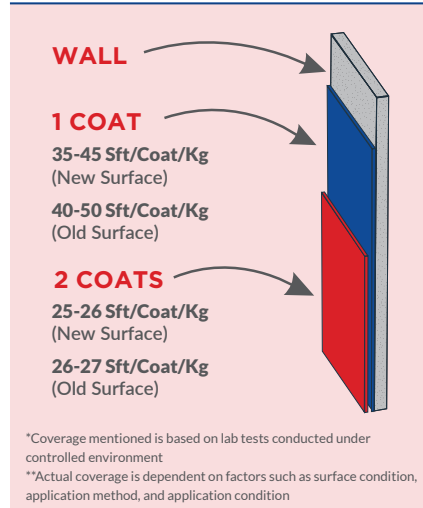

UNIQUE FEATURE

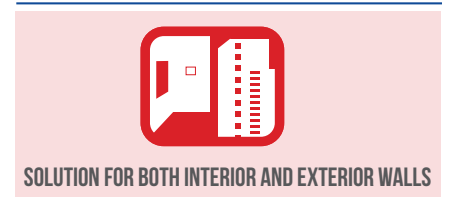

SURFACE PREPARATION



Recommended Surfaces



All types of Plasters



Concrete Stone



Surface Preparation Method

For New Walls: It is required to allow newly plastered surfaces to mature for a period of at least 2 months of drying for best performance. In case of urgency, consumers may apply the Berger All Purpose Putty White after 15 days of plaster curing to get a relatively satisfactory result but the applied putty must allow for a minimum of ten days to ensure faster drying so that the wall moisture reaches 25%. Ensure that the surface is free from loose particles and any greasy/oily substance by cleaning the surface with emery rubbing paper or wire brush. As per the standard application method, moisture content should be 15% max (Reference equipment for measuring moisture content: Protimeter).

For Old Walls: Previously painted surface with cement paint should be wire brushed and washed with water. Previously emulsion paint applied surface is not recommended to use Berger All Purpose Putty White.

Berger offers a complete range of surface treatment solutions, please call 08000-123456 or visit your nearest Berger Experience Zone for more information.



METHOD OF APPLICATION



Scrub the dirt off using brush or wire-brush and wash with water



Before applying, create a paste using 40-50% water with the putty. Apply the putty on a clean wall using knife brush (putty knife)



Apply the putty on a wetted wall from the bottom with a knife brush. To fill up the holes of a wall and make it smooth, dilute the putty with water as necessary



Wait for 3 hours for the putty to dry after the first coat and then apply a second coat. Let it dry overnight properly



After the wall is properly dried, scrub the wall with fine 300-500 grade sandpaper. The wall is now ready to paint



MIXING RATIOS



Putty Knife - Putty : Water = 2 : 1
(By volume)



ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond the recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at temperature below 10°C (50°F)
- ◆ For best result apply two coats of Berger All Purpose Putty



ACCOMPANYING PRODUCT

N/A



SHEEN SCALE

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss

***Only available in White**



PRODUCT SPECIFICATION



TOUCH DRY



PIGMENTATION

TITANIUM DIOXIDE

MAGNESIUM SILICATE

ALUMINUM SILICATE



VISCOSITY AT 30°C

Powder form



HARD DRY



(Recoat)

*For finish coat application after 24 hrs



SOLVENT



WATER



METHOD OF APPLICATION



PUTTY KNIFE



VEHICLE

Cement based

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated based on results obtained on a prepared smooth surface.