



Ultimate painting solution for your dream home

JHILIK SYNTHETIC ENAMEL



PRODUCT DESCRIPTION

Jhilik Synthetic Enamel is alkyd-based synthetic enamel formulated to give a glossy durable surface in interior & exterior applications. It is equally suitable for wood and steel furniture, toys and various household items.



GLOSSY FINISH



LONG-LASTING PERFORMANCE




EXCELLENT COVERAGE




PRODUCT INFORMATION

PACK SIZES

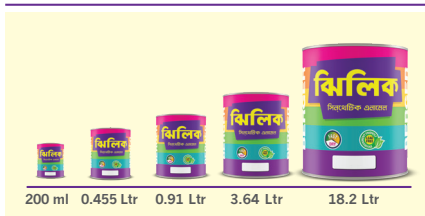

COVERAGE

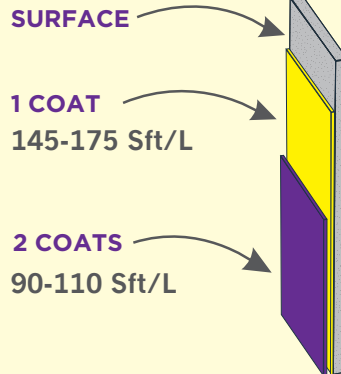

*Coverage mentioned is based on lab tests conducted under controlled environment
**Actual coverage is dependent on factors such as surface condition, shade selection, application method, and application condition

UNIQUE FEATURE



SURFACE PREPARATION



Recommended Surfaces



Metal surface



Wood



Various other Surfaces



Surface Preparation Method

Remove grease, oil and other contaminants. Then remove surface rust and other corrosive material by using suitable device/ chemicals.

Berger offers a complete range of surface treatment solutions, please call 08000-123456 or visit your nearest Berger Experience Zone for more information.



METHOD OF APPLICATION



Stir the paint well



Use a brush, roller or spray to paint



Dilute the paint with Thinner T-6 as necessary



Let the first coat of application dry for 18 hours and apply a second coat



General 1-2 coats of paint is needed



THINNING RATIO



(7-10) %




ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond the recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at a temperature below 10°C (50°F)
- ◆ Thinning ratio: (7-10)%




RECOMMENDED UNDERCOATS



Robbialac Red Oxide Primer




SHEEN SCALE




PRODUCT SPECIFICATION




GLOSS:



TACK FREE



VISCOSITY AT 30°C




TOUCH DRY



RECOAT ABILITY



METHOD OF APPLICATION



HARD DRY



RECOMMENDED FILM THICKNESS

25-30 μ/Coat



VOC

375 - 425 g/L
(w/v)



SHELF LIFE



*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated based on results obtained on a prepared smooth surface.