



Beautiful Interiors of A Dream Home

LUXURY MATTE EMULSION



PRODUCT DESCRIPTION

Luxury Matte Emulsion is designed to present your wall with an exclusive finish and feather touch feel that reveals aesthetic appeal. This is a green product. The advanced binder technology with adhesion enhancer and finer-graded special pigments demonstrates the product's luxurious entreaty. A special broad spectrum non-toxic and green fungicide and biocide impart strong anti-fungal properties to this product. It has an exceptionally high scrub resistance and can be washed frequently with water or a mild solution of water and soap (not detergent) for easy maintenance.

For best results, special care should be taken to prepare an absolutely smooth and leveled surface for painting. After surface preparation, the surface should be properly sealed with the recommended cement primer to ensure proper adhesion and prevent absorption of the emulsion into the substrate.



ULTRA SMOOTH FEATHER TOUCH FINISH



ANTI-BACTERIAL AND ANTI-FUNGAL PROPERTIES



OUTSTANDING ALKALI & EFFLORESCENCE RESISTANCE



LOW VOC AND APEO FREE




GMR SUBSTANCES FREE

PRODUCT INFORMATION

PACK SIZES




COVERAGE

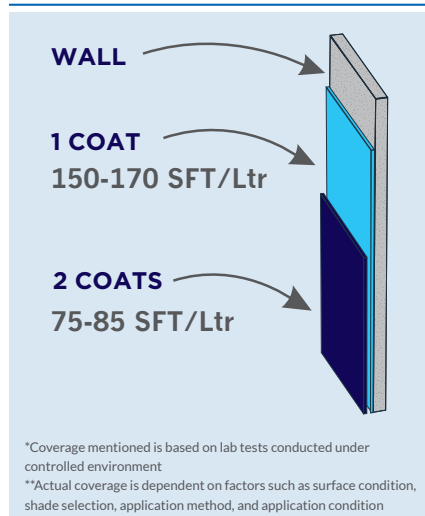


UNIQUE FEATURE



WASHABILITY

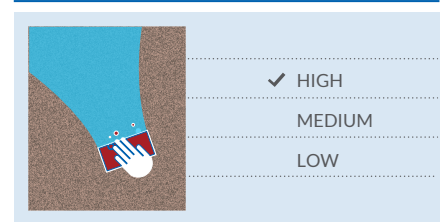

SURFACE PREPARATION



Recommended Surfaces



Interior Plastered Surface



Cement Plaster



Concrete Blocks & Stone



Cement Sheet



Brick Asbestos



Surface Preparation Method

For new walls: Newly plastered surfaces must be allowed to mature for a period of 3 to 4 months. Moisture content should be 15% max (equipment for measuring moisture content: Protimeter). Then treat the surface with Mr. Expert Salt Wash.

For old walls: Previously painted surface should be wire brushed and properly cleaned. Ensure that the surface is free from loose particles before paint application.

Please call 16804 or visit your nearest Berger Experience Zone for more information.

Berger offers a complete range of surface treatment solutions.





METHOD OF APPLICATION



1
Clean the surface by sanding with emery paper



2
Apply one coat of 100% thinned Robb Water Sealer and allow to dry for 4-6 hours



3
Apply two coats of Robb Wall Putty with a 6-8 hours interval



4
Sand the surface smooth after proper drying



5
Apply one coat of 100% thinned Robb Water Sealer and let it dry for 4-6 hours



6
Apply 2 coats of Luxury Matte Emulsion as finishing coat with 4-6 hours interval



MIXING RATIOS



For Brush - Paint : Water = 2 : 1
For Roller - Paint : Water = 3 : 1
(By volume)



ADDITIONAL INFORMATION

- ◆ Use the thinned material within 12 hours
- ◆ Do not retain the thinned material beyond recommended time
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at temperature below 10°C (50°F)



RECOMMENDED UNDERCOATS



Robbialac Wall Putty



Robbialac Water Sealer



SHEEN SCALE

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss



PRODUCT SPECIFICATION



SHADE/COLOR

Brilliant White, shades from Luxury series shade card, fandeck & Color Bank special



PIGMENTATION

TITANIUM DIOXIDE

MAGNESIUM SILICATE

ALUMINUM SILICATE



VISCOSITY AT 30°C

104 106 108 110 112 114
112 ± 2 KU



GLOSS/SHEEN LEVEL

05 10 15 20 25 30
AT 85°



SOLVENT



WATER



ETHYLENE GLYCOL



METHOD OF APPLICATION



ROLLER



BRUSH



TOUCH DRY

0 Min 10 Min 20 Min 30 Min 40 Min



AROMATIC CONTENT

20 ppm 40 60 80 100 120 ppm
Below 100 ppm



VEHICLE

Special type non-plasticized dispersion latex



HARD DRY

04 Hour 06 Hour 08 Hour 10 Hour 12 Hour
(Recoat)



TYPE OF CURE

Coalescence



FLAMMABILITY

N/A



% TOTAL SOLIDS (WEIGHT)

Approx: 52



SHELF LIFE

12 Months 18 24 30 36 Months
In sealed container kept in cool & dry place



TINTING

Universal colorants

*Halo Methane, Chlorinated Ethane, Polynuclear Aromatics and Chlorobenzenes not detectable.

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface.