



Beautiful decor of a dream home

WEATHERCOAT SUPREME PLUS TOPCOAT



PRODUCT DESCRIPTION

WeatherCoat Supreme Plus Topcoat is the ultimate premium solution for exterior surfaces which comes with a package combination of base coat and top coat for better durability. This product is formulated with extreme protection by IPN technology (Interpenetrating Polymer Network) enriched with nano & DPUR chemistry. Environmental friendly non plasticized dispersion latex and surface crosslinking feature enhance the performance in terms of mechanical properties and superior long-lasting durability in extreme climatic conditions. This coating performs an outstanding longevity with special fungicide and algacide through controlling microbe growth on surface. Its special nano additive technology offers excellent weatherproofing against UV ray in presence of acidic and salty environment.



SUPERIOR DIRT PICK-UP RESISTANCE



OPTIMUM BALANCE BETWEEN FLEXIBILITY AND DPUR



ANTI-CARBONATION PROPERTIES



HIGHLY EFFICIENT FOR HAIRLINE CRACK REMOVAL



EXCELLENT FILM HARDNESS AND ANTI-BLOCKING PROPERTIES

PRODUCT INFORMATION

PACK SIZES




0.9 Ltr

3.6 Ltr

18 Ltr

COVERAGE

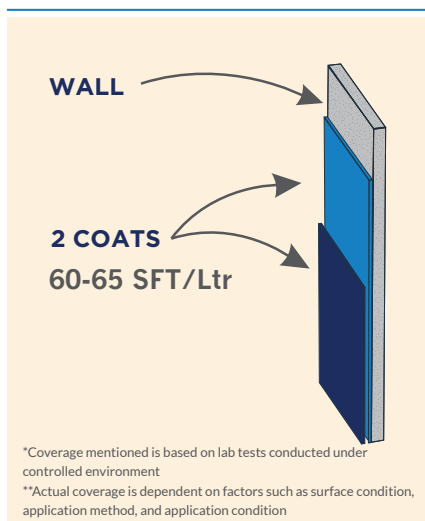

UNIQUE FEATURE

15 YEARS DURABILITY WARRANTY
10 YEARS WATERPROOFING WARRANTY

* Weathercoat Supreme Plus Basecoat must be used with Weathercoat Supreme Plus Topcoat to claim this warranty

SURFACE PREPARATION



Recommended Surfaces



Cement plaster



Concrete blocks & stone



Brick asbestos



Exterior plastered surface



Cement Sheet & all types of building



Surface Preparation Method

Surface preparation:

Surface must be clean, free from dust, grease, oil, heavy soot, chalk, growth of fungus, algae or moss, mildew etc. Chalk joints and fill holes where necessary. All old loose, flaking or peeling paint must be removed.

For new walls: It is advisable to allow new plastered surface to mature for only a period of 03 to 04 months. Ensure that the surface is free from loose particles and any greasy/oily substance by cleaning the surface through rubbing with emery paper or wire brush. Then treat the surface must with Mr. Expert salt wash.

For Old/Previously painted walls: In case of repainting job, previous coatings of lime wash/loosely bonded emulsion based paint must be scraped off. Earlier coatings of emulsion based paint need not to be removed if in sound condition. However, the gloss of such coatings must be removed by thorough sanding. Cracked or flaked paint must be removed completely.

Fungus affected areas need to separate through adequate treatment. Repair the cracked portion of plasters and areas (affected by leaks, drainage etc) properly with crack filler paste prior to painting. Allow the surface to dry sufficiently.



METHOD OF APPLICATION



Scrub clean with sandpaper



If the wall is affected by salt, wash the surface with Salt Wash



If the paint surface has holes on it, apply WeatherCoat Touch Putty



Apply 2 coats of Supreme Plus Basecoat maintaining 6-8 hours interval between the coats



Apply 2 coats of Basecoat and dry for 12 hours



Apply 2 coats of Supreme Plus Topcoat maintaining 6-8 hours interval between the coats



MIXING RATIOS



For Brush - Paint : Water = 2 : 1
For Roller - Paint : Water = 3 : 1
(By volume)



ADDITIONAL INFORMATION

- Use the thinned material within 12 hours
- Do not retain the thinned material beyond the recommended time
- Do not stretch the material beyond recommended coverage
- Do not apply paint at a temperature below 50°F (10°C)
- Moisture content of the wall should be below 15%
- pH value of the wall surface should be below 12



ACCOMPANYING PRODUCT



WC Touch Putty



WeatherCoat Supreme Plus Basecoat

Matt Finish

Egg Shell

Soft Sheen/Satin

High Sheen

Gloss

Super Gloss



PRODUCT SPECIFICATION



SOLVENT



WATER



ETHYLENE GLYCOL




% TOTAL SOLIDS (WEIGHT)


Approx 53



VISCOSITY AT 30°C



GLOSS / SHEEN LEVEL



PIGMENTATION


TITANIUM DIOXIDE

MAGNESIUM SILICATE

ALUMINIUM SILICATE



AROMATIC CONTENT



TOUCH DRY



CLEAN UP SOLVENT



WATER




VEHICLE

Special type non plasticized dispersion latex



HARD DRY



TYPE OF CURE

Coalescence

Safety Feature:

- Keep the product out of reach of children
- Store the product in lid tight condition in a cool & dry place
- Use proper Personal Protective Equipment during paint application
- In case of contact with eyes & skin, immediately wash with clean water and seek medical advice

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface.